

A selection of  
our product range

Spring 2010

# Promotion

New



**REMS**

for Professionals



## REMS CamScope – Brilliant pictures and videos of cavities, shafts and pipe

Radio signal transmission  
MicroSD card slot  
USB port



**New**

Radio signal transmission!



Ø 16 mm

Including  
2 GB MicroSD card



### REMS CamScope Set 16-1

Mobile, handy endoscope camera with radio signal transmission for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes, etc. Documentation of photos and videos on MicroSD card. Handheld unit with 4 batteries 1.5 V, AA, LR6 Removable controller unit with radio signal transmission, 3.5" TFT-LCD colour display, MicroSD card slot, USB port, video out socket PAL/NTSC, integrated Li-ion battery, 3.7 V, 1.2 Ah. 2 GB MicroSD card Camera cable set Colour 16-1, consisting of colour camera Ø 16 mm with dimmable white light LEDs and fixed focus function and 1 m formable push cable. Add-on mirror, add-on hook, add-on magnet Power supply unit/charger Li-ion 100–240 V, 50–60 Hz, 36 W, for controller unit USB cable, video cable In sturdy case. Art.-No. 175110 £ 274.00



**259.<sup>00</sup>**



### Camera Cable Set Colour 9-1

Colour camera Ø 9 mm with 1 m flexible push cable for the inspection of very narrow passages

Art.-No. 175104 £ **149.<sup>00</sup>**

### 900 mm Push Cable Extension

connectable up to a working length of 4.5 m

Art.-No. 175105 £ **33.<sup>00</sup>**



Universal  
Quick  
Easy  
Burr-free



#### REMS Akku-ROS P 40 Set

Battery powered pipe cutter for fast, easy cutting of plastic and composite pipes  $\varnothing \leq 40$  mm,  $\varnothing \leq 1\frac{1}{4}$ " ,  $s \leq 6.7$  mm Electrical drive with powerful 9.6 V, 70 W battery motor, maintenance-free gear, safety switch, on/off switch NiMH 9.6 V, 1.0 Ah battery, NiMH 100–240 V, 50–60 Hz, 6 W battery charger. With wedge-shaped blade in a box.  
Art.-No. 291310

REMS battery powered ROS P 40 – fast, easy cutting of pipes. Powerful, e.g.  $\varnothing 20$  mm composite pipe in only 4 s.

**New**

Up to 200 cut sections per battery charge!



**128.<sup>00</sup>**

Wedge-shaped blade for universal cutting of plastic and composite pipes



Heating element according to DVS  
Electronic temperature control  
Closed plane housing

Ideal for plumbers!

Quick clamping device also suitable for inclined outlets

**New**

#### REMS SSM 160KS

Heating element butt welding machine for plastic pipes and fittings of PB, PE, PP, PVDF,  $\varnothing 40-90$  mm  $\leq$  PN 16,  $\varnothing 40-110$  mm  $\leq$  PN 10,  $\varnothing 40-140$  mm  $\leq$  PN 6,  $\varnothing 40-160$  mm  $\leq$  PN 4. Heating element butt welding device with PTFE-coated 230 V, 50–60 Hz, 1200 W heating element. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control Protective cover for heating element Electrical planing device 230 V, 50–60 Hz, 500 W. Pressing device. Quick clamping device, also for inclined outlets, consisting of 2 vices with 2 clamping inserts each  $\varnothing 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160$  mm 2 pipe rests  $\varnothing 160$  mm with pipe rest inserts  $\varnothing 40, 50, 56, 63, 75, 90, 110, 125, 135, 140$  mm Sheet steel base with installed drawer. Operating key. Closed sheet steel subframe = transport box  
Art.-No. 252046 £ 3.560,00

**3,199.<sup>00</sup>**





Super fast  
Right angled  
Chip-free  
No outer burr  
Dry cutting



### REMS Nano

Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10–40 mm, without outer burr. With maintenance-free gear, proven DC motor 110 V, 50–60 Hz, 200 W. Speed 130 rpm. Back pressure rollers made of hardened precision steel. Safety switch. Without cutter wheel. In carrying bag. Art.-No. 844010

**272.<sup>00</sup>**

REMS Nano – cutting up to DN 40  
e.g. copper pipe Ø 22 mm in only 3 s.

For pipes of the press fitting systems made of stainless steel, carbon steel, Ø 12–28 mm, copper Ø 10–35 mm. Multilayer composite tubes Ø 10–40 mm.



only 1,9 kg

### REMS cutter wheel Cu-INOX

for stainless steel pipes of pressfitting systems, copper, carbon steel Art.-No. 844050

**17.<sup>50</sup>**

### REMS cutter wheel V

for multilayer composite pipes Art.-No. 844051

**17.<sup>50</sup>**

Cutting pipes super fast –  
stainless steel pipe Ø 54 mm in just 4 s.  
Universal for many pipes



### REMS Cento

Pipe cutting machine for fast, right angled, cutting of pipes with no outer burr Ø (8) 22–108 mm. Rollers in hardened precision steel pipe. Safety foot-switch. Ring spanner. Without cutter wheel. Art.-No. 845001 £ 782.00

**615.<sup>00</sup>**



Patent  
DE 10 2005 053 179

1200 W  
only 17 kg

+  **REMS cutter wheel free of charge**  
Value £ 50.60

+ **Free REMS waistcoat!**



### REMS Cutter wheel Cu-INOX

for stainless steel, carbon steel and copper pipes of pressfitting systems

Art.-No. 845050

**50.<sup>60</sup>**

### REMS Cutter wheel St

for steel pipes DIN EN 10255, cast iron pipes (SML), from machine no. 630000

Art.-No. 845052

**50.<sup>60</sup>**

### REMS Cutter wheel V

for plastic and multi-layer composite pipes, wall thickness s ≤ 7 mm

Art.-No. 845051

**50.<sup>60</sup>**

### Stand

Art.-No. 849315 £ 109.40

**79.<sup>00</sup>**

### REMS Herkules, 3-legged pipe stand

Art.-No. 120100 £ 181.00

**155.<sup>00</sup>**

### REMS Herkules Y, material support

Art.-No. 120130

**109.<sup>40</sup>**

### REMS Jumbo, Folding work bench

Art.-No. 120200 £ 214.00

**169.<sup>00</sup>**


REMS Power-Press E – the low cost radial press up to Ø 108 mm.

Universal  
up to Ø 108 mm  
Safe  
Fast  
Universal

With liability transfer agreement<sup>1)</sup>



only 4,7 kg<sup>1)</sup>



**REMS cropping tongs M10**  
Value £ 129



**REMS Power-Press E Basic-Pack**

Electric radial press for producing pressing joints Ø 10–108 mm. For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing chains. Pressing tongs seat with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, safety tip switch. In sturdy steel case.

Art.-No. 572110 £ 597,00<sup>2)</sup>





**+ Free REMS waistcoat!**



**569.<sup>00</sup>**

**REMS cropping tong – for cutting threaded rods.**

High performance cropping tongs in forged and specially hardened steel for cutting threaded rods. M 6–M 12 up to hardness classification 4.8 (400 N/mm<sup>2</sup>). Drive through all REMS radial presses (except radial presses Mini) and through suitable radial presses of other makes. All cropping tongs marked with \* have an optional connection (Patent EP 1 223 008, patent US 6,739,172) for manual drive through the radial press REMS Eco-Press.



**REMS cropping tong**

- M 6\* Art.-No. 571890
- M 8\* Art.-No. 571895
- M 10 Art.-No. 571865
- M 12 Art.-No. 571870

£ 129,00 now only

**105.<sup>00</sup> /piece**

<sup>1)</sup> Drive unit without Pressing tong.

<sup>2)</sup> A hold-harmless and indemnification agreement has been concluded with the Central Organization for the Sanitary-, Heating- and Climatization Industries (ZVSHK), BHKS, suissetec and B.S.H.L.

REMS Li-Ion technology  
 20% faster  
 50% more presses  
 30% lighter  
 Up to Ø 40 mm



Drive unit REMS Mini-Press ACC with pressing tongs installed has an 'overall length' of less than 34 cm. Therefore crimping also possible in particularly tight areas.

The original single hand operated radial pressing machine!  
 Only 2.4 kg!<sup>2)</sup>



**REMS Mini-Press ACC Li-Ion Basic-Pack**

Cordless radial press with automatic circuit control for producing pipe pressing joints Ø 10–40 mm. For operating with REMS pressing tongs Mini. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, Safety tip switch. Battery motor 14,4 V, 420 W, battery Li-Ion 14,4 V, 1,3 Ah, rapid charger Li-Ion 230 V or 110 V, 50–60 Hz, 65 W. In sturdy steel case. Art.-No. 578012 £ 1,149.00



+ Free REMS waistcoat!



**Battery Li-Ion 14,4 V, 1,3 Ah**  
 Value £ 100.20

**829.00**



**For all REMS cordless Li-Ion radial press models:**

Battery Li-Ion 14,4 V, 2,2 Ah	Art.-No. 571550	<b>109.00</b>
Voltage supply Li-Ion 230 V	Art.-No. 571565	<b>257.00</b>
Rapid charger Li-Ion/Ni-Cd 230 V, 50–60 Hz, 65 W	Art.-No. 571560	<b>114.00</b>



**REMS pressing tongs Mini – for all common pressfitting systems**

**All pressing tongs Mini** £ 90.40 now only **69.00** /each



**20% faster. 50% more presses. 30% lighter.**

The new REMS Li-Ion technology is the benchmark as regards efficiency and user friendliness. The high energy density of the Li-Ion batteries allows for approx. 50% more presses at 30% lower weight. Powerful 14.4 V battery motors press 20% faster. Environmentally friendly, as cadmium-free.

With liability transfer agreement<sup>1)</sup>



<sup>1)</sup> A hold-harmless and indemnification agreement has been concluded with the Central Organization for the Sanitary-, Heating- and Climatization Industries (ZVSHK), BHKS, suissetec and B.S.H.L.  
<sup>2)</sup> Drive unit without Pressing tong.  
 £ excl. VAT. Promotion until 30<sup>th</sup> June 2010.



Safe  
Fast  
Universal  
Automatic-  
Circuit-Control

For operating with REMS pressing tongs/pressing rings and with pressing tongs/chains of numerous other manufacturers/suppliers.



←ACC→  
Automatic Circuit Control

only 4,8 kg<sup>2)</sup>



### REMS Power-Press ACC Basic-Pack

Electro-hydraulic drive unit with automatic circuit control.

In sturdy steel case.

Art.-No. 577010 £ 949,00\*

**759.00**



### REMS Akku-Press Li-Ion Basic-Pack

Electro-hydraulic drive unit with switch-off signal,

battery Li-Ion 14,4 V, 2,2 Ah, rapid charger. In sturdy steel case.

Art.-No. 571013 £ 1,002,00\*

**799.00**



### REMS Akku-Press ACC Li-Ion Basic-Pack

Electro-hydraulic drive unit with automatic circuit control,

battery Li-Ion 14,4 V, 2,2 Ah, rapid charger. In sturdy steel case.

Art.-No. 571014 £ 1,140,00\*



**Battery Li-Ion 14,4 V, 2,2 Ah**  
Value £ 109,40

**929.00**

+ **Free REMS waistcoat!**  
(only REMS Akku-Press ACC Li-Ion)



←ACC→  
Automatic Circuit Control

only 4,3 kg<sup>2)</sup>



### REMS pressing tongs – for all common pressfitting systems

REMS Pressing tongs M 12–35	£ 109,40	now only	<b>79.00</b> /each
REMS Pressing tongs V 12–35	£ 109,40	now only	<b>79.00</b> /each
REMS Pressing tongs M 42 or M 54	£ 325,00	now only	<b>269.00</b> /each
REMS Pressing tongs V 42 or V 54	£ 194,00	now only	<b>169.00</b> /each

### REMS pressing rings

REMS pressing rings (PR) with three pivoted pressing segments aligned on a flexible ring for sophisticated pressing of large dimensions. Ideal pressing through radially controlled movement of pressing segments, with adaptor tong.



**REMS pressing rings M 42 (PR)** Art.-No. 572706 £ 227,00 **599.00**

**REMS pressing rings M 54 (PR)** Art.-No. 572708 £ 227,00 **599.00**

**Adaptor tong Z3**  
For driving REMS pressing rings (PR) 42–75 mm Art.-No. 572800 £ 183,00 **159.00**

**New**



Quality die stocks  
for professionals!



### REMS Mini-Amigo Set M 20-25-32

Electric die stock for pipe threads  $\frac{1}{4}$ "– $\frac{3}{4}$ ", 16–32 mm. Drive unit, support bracket, quick-change die heads. In carrying bag.  
Art.-No. 530011 £ 386.00

**299.<sup>00</sup>**



The die stock for professionals

### REMS Eva Set R $\frac{1}{2}$ -2

Hand die stock for pipe threads  $\frac{1}{2}$ "–2", 16–50 mm, bolt threads 6–30 mm,  $\frac{1}{4}$ "–1". Ratchet lever, quick-change die heads. In sturdy steel case.  
Art.-No. 520017 £ 386.00

**299.<sup>00</sup>**



The fastest, strongest and lightest up to 1"

### REMS Amigo E Set M 20-25-32

Electric die stock for pipe threads  $\frac{1}{4}$ "–1", 16–32 mm, bolt threads 6–30 mm,  $\frac{1}{4}$ "–1". Drive unit, support bracket, quick-change die heads. In sturdy steel case.  
Art.-No. 530014 £ 497.00

**349.<sup>00</sup>**



The smallest, lightest, strongest and fastest up to  $1\frac{1}{4}$ "

### REMS Amigo Set R $\frac{1}{2}$ - $\frac{3}{4}$ -1- $1\frac{1}{4}$

Electric die stock for pipe threads  $\frac{1}{2}$ "– $\frac{3}{4}$ ", 16–40 mm, bolt threads 6–30 mm,  $\frac{1}{4}$ "–1". Drive unit, support bracket, quick-change die heads. In sturdy steel case.  
Art.-No. 530020 £ 589.00

**449.<sup>00</sup>**



Extremely strong up to 2"

### REMS Amigo 2 Set R $\frac{1}{2}$ - $\frac{3}{4}$ -1- $1\frac{1}{4}$ - $1\frac{1}{2}$ -2

Electric die stock for pipe threads  $\frac{1}{4}$ "–2", 16–50 mm, bolt threads 6–30 mm,  $\frac{1}{4}$ "–1". Drive unit, support bracket, quick-change die heads. In sturdy steel case.  
Art.-No. 540020 £ 947.00

**+** Free REMS waistcoat!  
2 x REMS Spezial Spray 600 ml  
Value £ 22.80

**669.<sup>00</sup>**



1700 W  
only 6,5 kg



REMS Threading machines – a class of its own

Universal automatic die head.  
Automatic lubrication and cooling.  
Automatic chuck.



+ Free REMS waistcoat!



### REMS Tornado 2000

Proven high performance machine for threading, cutting, deburring, threading of nipples, roll grooving (accessory). Pipe threads 1/16–2" (with REMS 4" automatic die head 2 1/2–4"), 16–63 mm, bolt threads 6–60 mm, 1/4–2". Machine complete with dies BSPT 1/2–3/4", BSPT 1–2". Portable version with 3 tubular legs, with removable large oil basin and chip tray. Universal motor 110 V, 50–60 Hz, 1700 W, 53 rpm.

Art.-No. 340200 £ 2,640.00

+ 4 x REMS Spezial oil 5 l Art.-No. 140100 £ 143.20

£ 2,783.20

Package price only **1,769.<sup>00</sup>**

REMS Magnum – the compact up to 2".



+ Free REMS waistcoat!



### REMS Magnum 2000 L-T

Threading, cutting, deburring, nipple threading, roll grooving with REMS roll grooving attachment. Pipe threads 1/16–2" (with REMS 4" automatic die head 2 1/2–4"), 16–63 mm, bolt threads 6–60 mm, 1/4–2". Machine complete with dies BSPT 1/2–3/4", BSPT 1–2". Light version with removable large oil basin and chip tray for work bench, stand or wheel stand. Version T with integrated, even larger oil basin and chip tray for work bench, stand or wheel stand with material support.

Art.-No. 340226 £ 2,860.00

+ REMS wheel stand Art.-No. 344100 £ 322.00


+ 4 x REMS Spezial oil 5 l Art.-No. 140100 £ 143.20

£ 3,325.20

Package price only **2,269.<sup>00</sup>**

REMS Magnum –  
the super machine  
up to 4"

Exceptionally round and clean threads  
up to 4" by using 6 threading dies.

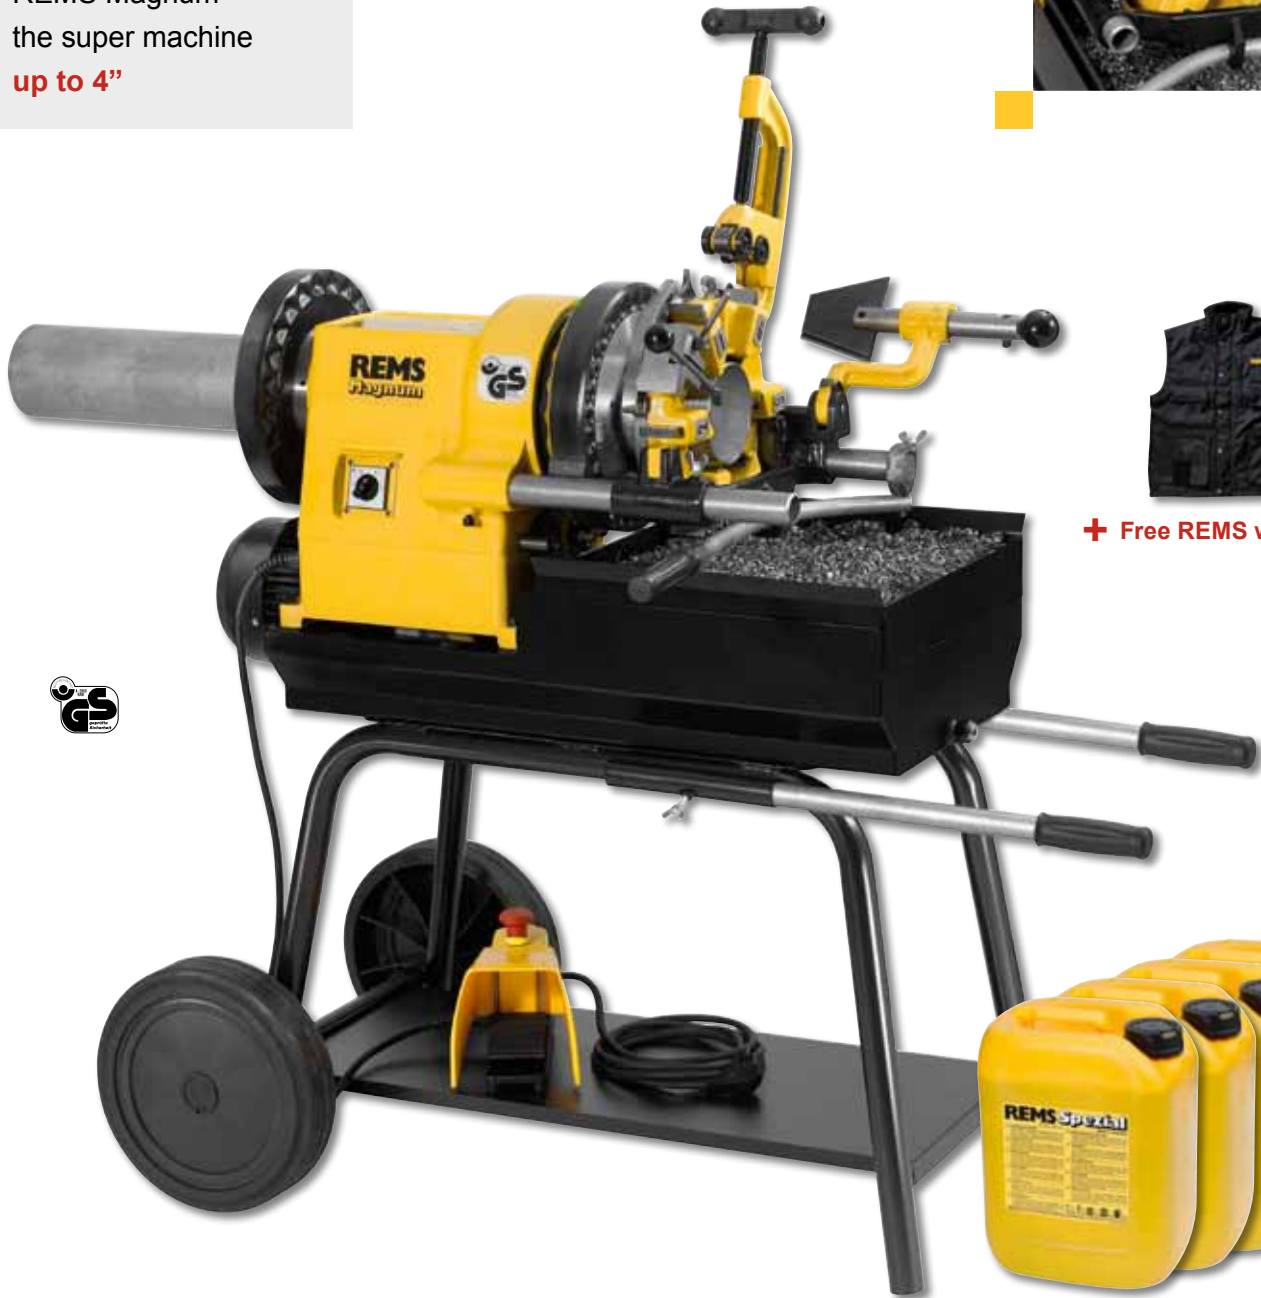

+ Free REMS waistcoat!



### REMS Magnum 4000 T (Equipment R 1/2–4")

Threading machine for pipe threads (1/16) 1/2–3", 16–63 mm, bolt threads (6) 20–60 mm, 1/2–2".  
With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling. With tool sets 1/16–2" and/or 2 1/2–3", each consisting of universal automatic die head for all threads, also long threads; automatic opening, with automatic thread-length-stop for tapered threads, dies for pipe threads, tapered, ISO 7-1, DIN EN 10226 (DIN 2999, BSPT) R right-hand, pipe cutter, inner pipe deburrer, pressing lever. Tool support. Universal motor 230 V or 110 V, 50–60 Hz, 1700 W. 23 rpm.

Version T with integrated, even larger oil basin and chip tray.

Art.-No. 380429 £ 4,710.00

+ REMS wheel stand Art.-No. 344100 £ 322.00

+ 4 x REMS Spezial oil 5 l Art.-No. 140100 £ 143.20

£ 5,175.20

Package price only **3,469.<sup>00</sup>**

### REMS Spezial

High-alloyed mineral based thread-cutting oil. Specially developed for threading. High lubricating and cooling effect. Essential for clean threads, long service life of dies, tools and machines. Pleasant to work with. Can be washed out with water, approved by experts. Also well suited as a cooling lubricant for sawing metals. REMS Spezial spray without CFC's, so ozone-harmless.



#### Spray 600 ml

Art.-No. 140105 £ 11.40

**8.<sup>00</sup>**

#### Can 5 l

Art.-No. 140100 £ 35.80

**23.<sup>00</sup>**



### Universal automatic die head 1/16–2" and others

Tool set 1/16–2" complete with universal automatic die head, dies for pipe threads, tapered, ISO 7-1, DIN EN 10226 (DIN 2999, BSPT) R 1/2–3/4 and R 1–2 right-hand, pipe cutter, inner pipe deburrer, pressing lever. Only one universal automatic die head for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. Fast and easy adjustment of thread size. Simple and fast change of dies through lock-in positioning in die holder.  
Art.-No. 341000

**451.<sup>00</sup>**



+ Free REMS waistcoat!



### REMS roll grooving attachment

Roll grooving attachment for grooving pipes of pipe coupling systems DN 25–200 (300), 1–8" (12"). Roll grooving attachment, hydraulic hand pump, built-in ring gauge for automatic groove-depth-stop, 1 set of grooving rollers (pressure roller, counterpressure roller) 2–6", hexagon key. For REMS Magnum, REMS Tornado or for threading machines of other makes.

### REMS roll grooving attachment

fit onto REMS Magnum and REMS Tornado  
Art.-No. 347000 £ 1,930.00

**1,590.<sup>00</sup>**

### Roll grooving attachment R 300

fit onto Ridgid 300  
Art.-No. 347001 £ 1,930.00

**1,590.<sup>00</sup>**



Universal for pipes and tubes up to Ø 32 mm, 180°  
Fast and creep speed  
Universal and compact  
1000 W



1000 W  
only 8 kg

+ Free REMS waistcoat!



### REMS Curvo Basic-Pack

Electric pipe and tube bender Ø 10–40 mm, Ø 1/4–1 1/4", up to 180°. Hard, half-hard and soft copper tubes, also thin-wall Ø 10–35 mm, Ø 1/4–1 1/4", coated soft copper tubes, also thin-wall Ø 10–18 mm, pipes of the press fitting systems made of stainless steel Ø 12–28 mm, carbon steel, also coated Ø 12–28 mm, soft precision steel tubes Ø 10–28 mm, steel pipes DIN EN 10255 Ø 1/4–3/4", electric conduit DIN EN 50086 Ø 16–32 mm, multi-layer composite tubes Ø 14–40 mm and others. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation, insert bolt. Bending formers and back formers. In sturdy steel case.  
Art.-No. 580010 £ 732.00



### Bending formers and back formers

(20 % discount on all sizes of bending formers and back formers – see pricelist or REMS catalogue for more information)

**649.<sup>00</sup>**

**– 20 %**



Easy  
Fast  
Vibration-free  
With speed regulation



+ Free REMS waistcoat!



Stepless electronic regulation  
for selecting the speed!



### REMS Picus SR Basic-Pack

Electric diamond core drilling machine with speed regulation. For core drilling in steel-reinforced concrete up to Ø 162 (200) mm, masonry up to Ø 250 mm. Universal motor 110 V, 50–60 Hz, 2200 W. Stepless electronic speed regulation 200 rpm to 500 rpm (1<sup>st</sup> gear) or 500 rpm to 1200 rpm (2<sup>nd</sup> gear), overheating protection. Multifunction electronics with soft starting, personal protection switch (PRCD). In sturdy steel case.

Art.-No. 183010 £ 1,290,00

**999.<sup>00</sup>**

### REMS Picus SR Set Duplex

REMS Picus SR Basic-Pack. Drill stand REMS Duplex complete with Allen key size 5 and 6, single open ended wrench size 19 and 30. Spacer. Sealing ring and cover plate with hose connection, for vacuum fastening. Fastening kit, consisting of 2 splaying anchors M12, 10 hammer anchors M12, setting iron for hammer anchors M12, cord threaded bar M12 x 65, quick damping nut, washer.

Art.-Nr. 183020 £ 1,950,00

**1,699.<sup>00</sup>**

### REMS Universal diamond core drilling crowns Ø 32–300 mm


Inductively soldered! Resolderable! Versatile for many types of material. Ideal for plumbers. Universally usable for dry and wet drilling, hand held or with drill stand. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Having sharpened diamond segments, ready to use. Single connecting thread UNC 1¼ female. Drilling depth 420 mm.

**Inductively soldered!  
Resolderable!**




**-20%**

Ø × drilling depth × connection	Number of segments	Art.-No.	£	Promotion
UDKB 32 × 420 × UNC 1¼	4	181010	125.00	-20%
UDKB 42 × 420 × UNC 1¼	4	181015	125.00	-20%
UDKB 52 × 420 × UNC 1¼	5	181020	129.00	-20%
UDKB 62 × 420 × UNC 1¼	6	181025	144.00	-20%
UDKB 72 × 420 × UNC 1¼	7	181030	159.00	-20%
UDKB 82 × 420 × UNC 1¼	7	181035	174.00	-20%
UDKB 92 × 420 × UNC 1¼	8	181040	180.00	-20%
UDKB 102 × 420 × UNC 1¼	8	181045	184.00	-20%
UDKB 112 × 420 × UNC 1¼	9	181050	217.00	-20%
UDKB 125 × 420 × UNC 1¼	10	181057	249.00	-20%
UDKB 132 × 420 × UNC 1¼	11	181060	274.00	-20%
UDKB 152 × 420 × UNC 1¼	12	181065	306.00	-20%
UDKB 162 × 420 × UNC 1¼	12	181070	327.00	-20%
UDKB 182 × 420 × UNC 1¼	12	181075	353.00	-20%
UDKB 200 × 420 × UNC 1¼	12	181080	413.00	-20%
UDKB 225 × 420 × UNC 1¼	13	181085	526.00	-20%
UDKB 250 × 420 × UNC 1¼	14	181090	646.00	-20%
UDKB 300 × 420 × UNC 1¼	22	181095	693.00	-20%

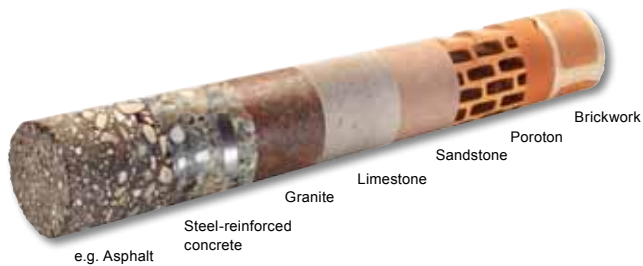

**Diamond, roof-shaped segments!  
Laser-welded!  
High temperature-resistant!**



**New**

### REMS Universal diamond core drilling crowns LS Ø 32–200 mm

Laser-welded, high temperature-resistant Only one REMS universal diamond core drill crown for many materials Universally usable around dry and wet drilling Diamond segments with wedge-shaped cut ("roof shape") for fast, easy and quiet drilling Laser-welded on fully automatic welding machines for consistent high quality of the weld High temperature-resistant, even under extreme temperature load, no desoldering of the segments due to overheating Uniform connecting thread UNC 1¼ inside, drilling depth 420 mm.

**-20%**



Ø × drilling depth × connection	Number of segments	Art.-No.	£	Promotion
UDKB-LS 32 × 420 × UNC 1¼	1	181410	137.00	-20%
UDKB-LS 42 × 420 × UNC 1¼	4	181415	137.00	-20%
UDKB-LS 52 × 420 × UNC 1¼	5	181420	142.00	-20%
UDKB-LS 62 × 420 × UNC 1¼	6	181425	158.00	-20%
UDKB-LS 72 × 420 × UNC 1¼	6	181430	174.00	-20%
UDKB-LS 82 × 420 × UNC 1¼	7	181435	192.00	-20%
UDKB-LS 92 × 420 × UNC 1¼	8	181440	198.00	-20%
UDKB-LS 102 × 420 × UNC 1¼	9	181445	203.00	-20%
UDKB-LS 112 × 420 × UNC 1¼	9	181450	239.00	-20%
UDKB-LS 125 × 420 × UNC 1¼	10	181457	273.00	-20%
UDKB-LS 132 × 420 × UNC 1¼	10	181460	302.00	-20%
UDKB-LS 152 × 420 × UNC 1¼	11	181465	336.00	-20%
UDKB-LS 162 × 420 × UNC 1¼	12	181470	359.00	-20%
UDKB-LS 182 × 420 × UNC 1¼	13	181475	389.00	-20%
UDKB-LS 200 × 420 × UNC 1¼	14	181480	454.00	-20%

- Smaller
- Faster
- Economical
- Environmentally safe
- Particularly compact, deep-freezer heads

Pipes electrically freezing instead of draining. Super fast up to 2". High cooling capacity.



**+ Free REMS waistcoat!**

Patent EP 1108 944

### REMS Frigo 2

Electric pipe freezing unit with closed refrigerant circuit. For steel, copper, plastic, composite pipes, Ø ¼–2", Ø 10–60 mm. Cooling aggregate 230 V or 110 V, 50 Hz, 430 W, 2 refrigerant hoses, 2 tightening straps, squirt bottle. Equipped for Ø ¼–1¼", 15–42 mm. In sturdy sheet metal housing. Art.-No. 131011 £ 1,190.00

### Package price up to 2":

<b>REMS Frigo 2</b>	Art.-No. 131011	£ 1,190.00
<b>+ Extension kit up to 1½–2" / 54–60 mm</b>	Art.-No. 131160	£ 152.80

**1,342.00**

up to 1¼": **819.<sup>00</sup>**

Package price only **925.<sup>00</sup>**



Up to 6", 250 mm  
Extremely versatile  
and powerful.  
For hard work  
With Vario-Elektronic



Guide support up to 4"

Art.-No. 563100

**114.<sup>70</sup>**

**New**



only 3,1 kg



30 % more cuts!  
40 % lighter battery!  
No memory effect!



**REMS Akku-Cat ANC VE Li-Ion**

Battery driven universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing up to 6", 250 mm. battery Li-Ion 18 V, 2,6 Ah, rapid charger Li-Ion 230 V or 110 V, 50-60 Hz, 65 W. Universal saw blade clamp. Hexagon key. 1 REMS universal saw blade 150 mm. In sturdy case.

Art.-No. 560051 £ 588.00

**495.<sup>00</sup>**



1050 W



**REMS Tiger ANC Set**

Electric reciprocating pipe saw with fixed, ideal speed for effortless, rapid, right angle sawing of steel pipes with guide support and for free-hand sawing up to 6", 250 mm. Complete with guide support up to 2" and 2 REMS special saw blades up to 2". In sturdy steel case.

Art.-No. 560020 £ 474.00

**379.<sup>00</sup>**



1400 W



**+ Free REMS waistcoat!**



**REMS Tiger ANC SR Set**

Electric reciprocating pipe saw with speed regulation for effortless, rapid, right angle sawing with guide support and for free-hand sawing up to 6", 250 mm. Complete with guide support up to 2" and 2 REMS special saw blades up to 2". In sturdy steel case.

Art.-No. 560026 £ 552.00

**419.<sup>00</sup>**

**REMS special saw blade – for right angle sawing and for fast dismantling of steel pipes with power transmitting guide support.**


Description	Length mm	Tooth pitch mm	Material	Colour	Art.-No. Pack of 5	Listprice £	Promotion £
<b>REMS special saw blade 2"</b> for steel pipes up to 2"	140	2.5	HSS-Bi	yellow	561007	34.60	<b>25.00</b>
<b>REMS special saw blade 2"</b> for steel pipes up to 2"	140	3.2	HSS-Bi	yellow	561001	32.80	<b>24.50</b>
<b>REMS special saw blade 4"</b> for steel pipes up to 4"	200	3.2	HSS-Bi	yellow	561002	43.40	<b>30.00</b>



For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, use the finer toothed REMS universal saw blade instead of the REMS special saw blade in combination with REMS Tiger ANC SR with electronic speed regulation

**Universal saw blade for free-hand sawing and for sawing with power transmitting guide support. Instead of many different saw blades.**


Description	Length mm	Tooth pitch mm	Material	Colour	Art.-No. Pack of 5	Listprice £	Promotion £
<b>REMS universal saw blade 100</b>	100	Combo 1.8/2.5	HSS-Bi	red	561006	21.30	<b>17.00</b>
<b>REMS universal saw blade 150</b>	150	Combo 1.8/2.5	HSS-Bi	red	561005	30.80	<b>22.00</b>
<b>REMS universal saw blade 200</b>	200	Combo 1.8/2.5	HSS-Bi	red	561003	41.80	<b>29.00</b>
<b>REMS universal saw blade 300</b>	300	Combo 1.8/2.5	HSS-Bi	red	561004	59.60	<b>39.00</b>

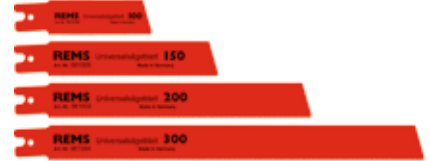

Also for nail-embedded wood, pallets. For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, lower speed required, e.g. by using REMS Tiger ANC SR with electronic speed regulation

**REMS saw blades for free-hand sawing for many purposes**

Description	Length mm	Tooth pitch mm	Material	Colour	Art.-No. Pack of 5	Listprice £	Promotion £
<b>REMS saw blade</b> Metal 3 mm and thicker	100 150 200	1.8	HSS-Bi	red	561101 561103 561102	12.30 14.30 18.00	<b>9.80</b> <b>11.40</b> <b>14.40</b>
<b>REMS saw blade</b> Metal 1–3 mm	150	1.4	HSS-Bi	red	561104	14.30	<b>11.40</b>
<b>REMS saw blade</b> Metal 1–3 mm (for curved cuts)	90	1.4	HSS-Bi	red	561107	12.30	<b>9.80</b>
<b>REMS saw blade</b> Metal 4 mm and thicker, nail-embedded wood, pallets	150	2.5	HSS-Bi	black	561110	13.70	<b>11.00</b>
<b>REMS saw blade</b> All types of wood	300	4	WS	black	561111	16.50	<b>13.20</b>
<b>REMS saw blade</b> Plasterboards, breeze blocks, etc.	150	5	WS	white	561115	11.80	<b>9.40</b>

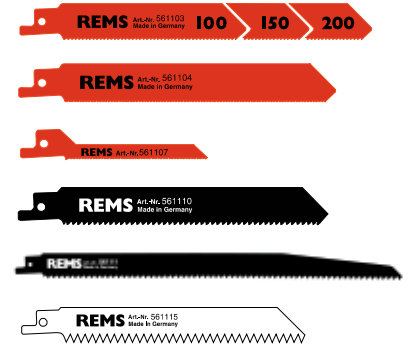

**REMS E-Push**

Electric pressure testing pump for pressure and tightness tests of piping systems and receptacles up to 60 bar/870 psi.  
Art.-No. 115100 £ 533.00

**369.<sup>00</sup>**



**REMS Push**

Hand pressure testing pump for pressure and tightness testing of piping systems and receptacles up to 60 bar/870 psi.  
Art.-No. 115000 £ 241.00

**139.<sup>00</sup>**

Flush, fill and vent  
in one operation.  
Self priming.  
High pumping  
capacity.

REMS Solar-Push – Powerful electric filling and flushing unit  
for easy and fast filling, flushing and venting of closed systems



**+ Free REMS waistcoat!**  
(only REMS Solar-Push I Set EPDM)



### REMS Solar-Push I Set PVC

Pumping capacity ≤ 30 ltr/min, Tank volume 30 ltr. With impeller pump. Pumping pressure ≤ 4 bar/0.4 MPa/58 psi. Pumping capacity at 40 m vertical pumping height 10 ltr/min, temperature resistant for constant use ≤ 80°C, with capacitor motor 110 V, 50 Hz, 370 W. Pressure release valve. With PVC-woven hoses ½", temperature resistant ≤ 60°C. In carton.  
Art.-No. 115210 £ 576.00

**499.00**



### REMS Solar-Push I Set EPDM

Pumping capacity ≤ 30 ltr/min, Tank volume 30 ltr. With impeller pump. Pumping pressure ≤ 4 bar/0.4 MPa/58 psi, Pumping capacity at 40 m vertical pumping height 10 ltr/min, temperature resistant for constant use ≤ 80°C, with capacitor motor 110 V, 50 Hz, 370 W. Pressure release valve. With EPDM-woven hoses ½", high temperature resistant ≤ 170°C. In carton.  
Art.-No. 115211 £ 639.00

**579.00**

### Accessories for REMS Solar-Push:

#### Screw-cap

with flow return connection,  
for flushing floor heating systems

Art.-No. 115220

**32.20**

#### Filter bags (pack of 10)

Art.-No. 115221

**41.40**

Sale through specialist dealers.



### REMS (UK) Ltd.

Unit 5 · Ash Industrial Estate  
Flex Meadow · Harlow · Essex CM19 5TJ  
Phone +44 12 79 41 36 98  
Fax +44 12 79 41 37 04  
www.rems.de  
GBR@rem.de